

Cooling Unit wcu 1kW A / B

Ref. 039773 (WCU 1kW A)

Ref. 032217 (WCU 1kW B)



The cooling units WCU 1kW A & B provide cooling to liquid cooled TIG torches. Controlled and powered by the corresponding TIG generator, the cooling unit's operation is controlled by the torch. They automatically activate when the TIG welding starts.

Connect the TIG generator to the cooling unit with two pre-installed connection cables


Attach the generator on to the cooling unit using the pre-drilled holes.

Protections :
- Minimum water level
- Abnormal water flow

Quick connectors with check valve to prevent liquid flow when disconnecting the machine from the cooling unit.

Fill gauge

Fill plug on the front

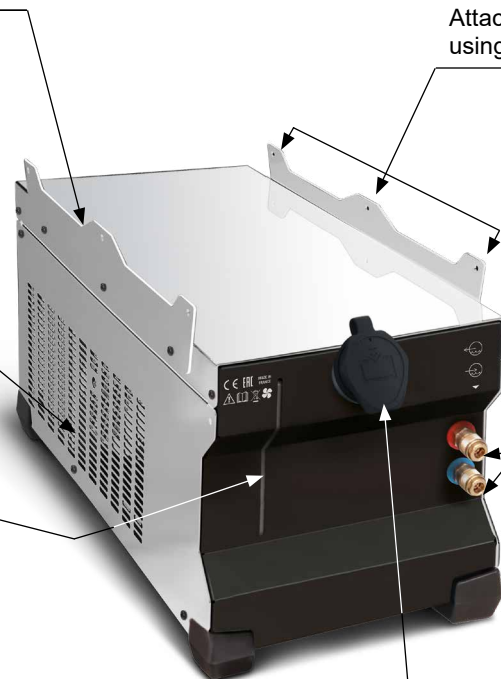

	WCU 1kW A	WCU 1kW B
Capacity	3 l	
Fuse	5 A	
Max. pressure	0.4 MPa	
Cooling capacity 1l/min (EN 60974-2)	1000 W	
Dimensions	52 x 24 x 26 cm	
Weight (Empty tank)	14 kg	15 kg

Compatibility	TIG 220 AC/DC	PROTIG 221 DC FV TIG PRO 221 DC FV	TIG 300 DC
---------------	---------------	---------------------------------------	------------