


The **EASYMIG 85** is a single-phase welding machine designed exclusively for gas-free flux-cored wire MIG welding. Very easy to use, the only setting that can be adjusted is the wire-feed speed. Recommended for welding steel up to 2 mm thick, the **EASYMIG 85** welding unit is ideal for all types of work, even outdoors.

## READY TO USE

- **Gasless flux-cored wire welding:** Ø 0.6 and 0.9 mm (double-groove roller)
- Unaffected by external environmental disturbances (wind, etc.)
- Increased portability due to lack of bulky cylinder

## EASY TO USE

- **Welding aid:** wire-feed speed chart to help the user adjust the wire-feed speed (A) according to the thickness of the workpiece (B) and the diameter of the wire used (C)

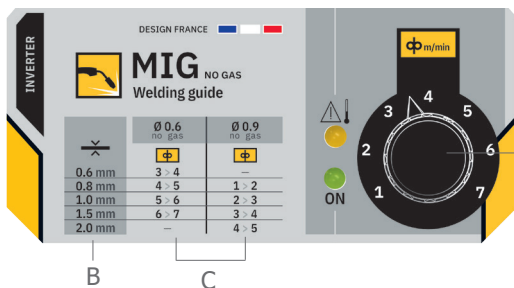

Intuitive control panel with a single potentiometer to select the wire-feed speed (seven levels)



Delivered in a cardboard box complete with accessories

## SECURE

- Optimised workstation cooling with thermal protection
- Overcurrent protected

## INTEGRATED WIRE-FEED REEL

- Compatible wire reel: Ø 100 mm - 1 kg
- Motorised wire-feed reel with two rollers

## ULTRA PORTABLE

- Ultra light (5 kg)
- This practical and small device can be stored anywhere (shelves, cabinets, etc.)
- A handle strap/shoulder strap makes it easy to move around the workshop

MIG Torch 2 m - 10 mm <sup>2</sup>	
Earth clamp 1.6 m - 10 mm <sup>2</sup>	
Flux-core wire reel Ø 0.6 mm AWS E71T-GS	
Fixed-tint 11 handheld face shield	 92 x 36 mm

## ACCESSORIES (optional)



Flux-cored wire - Plastic reel Ø 100 mm  
Ø 0.6 mm 086425  
Ø 0.9 mm 086104



Flux-cored wire - D-type roller  
Ø 0.6/0.9 mm 068926



Contact tip  
Ø 0.6 mm 041905  
Ø 1.0 mm\* 041929

\* for flux-cored wire Ø 0.9 mm

50/60 Hz	A	I <sub>2</sub> MIG A	NO GAZ	100	Electronic Control	m/min	équipé d'origine / original equipment / originalausstattung / equipamiento de fabrica	MIG EN 60974-1 (40°C)			U <sub>0</sub> V	cm	kg	IP
								IA (60%)	100%	X% (I <sub>2</sub> max)				
230 V - 1~	16	30 → 85	0.6 0.9	✓	10 W	1 → 7	0.6 0.9	50 A	40 A	85 A 20 %	30	29 x 14 x 19.5	5.5	IP 21