

The **MULTIWELD 250T-C** is a compact three-phase generator combining **MIG/MAG**, cored wire and **MMA** welding processes. Its intuitive interface integrates digital displays for easy and precise settings. With a reinforced structure including 2 handles for lifting and slinging, the **MULTIWELD 250T-C** is perfectly suited for welding in the workshop and on site use.

MULTIPROCESS

MIG/MAG welding :

- steel wire: Ø 0.6 to 1.2 mm
- stainless steel wire: Ø 0.8 to 1.2 mm
- aluminium wire: Ø 0.8 and 1.0 mm
- cored wire (reverse polarity): Ø 0.9 to 1.2 mm

MMA welding: basic and rutile electrodes (up to Ø 5 mm).

OPTIMISED MIG/MAG SETTINGS

- **Choice of the trigger mode:** 2T or 4T.
- **Welding aid:** table on the side of the generator to help the user adjust his tension and filler wire diameter according to the thickness of the material to be welded.

INTUITIVE

- Display readable even in bright light.
- **Simple interface** with large buttons and knobs for use with gloved hands.

INTEGRATED WIRE FEEDER

- Compatible wire reels: Ø 200 / 300 mm.
- Powerful 4 roller motorized wire-feeder for an efficient wire feeding.
- EURO torch connector for quick assembly/disassembly.

PRE-HEATING, PURE CO2

- Pre-installed socket (36 V - 4.2 A) for gas heater in pure CO2 welding (heater not included).
- Compatible with US (type A) and EURO electrical sockets (type C/E/F).

ROBUST


- Reinforced structure.
- 2 steel handles for easy manipulation.

ACCESSORIES (option)

250 A		
STEEL / STAINLESS STEEL	ALUMINIUM	
4 m	3 m	4 m
040922	040724	040939


Earth clamp
250 A - 4 m - 25 mm ²
043794

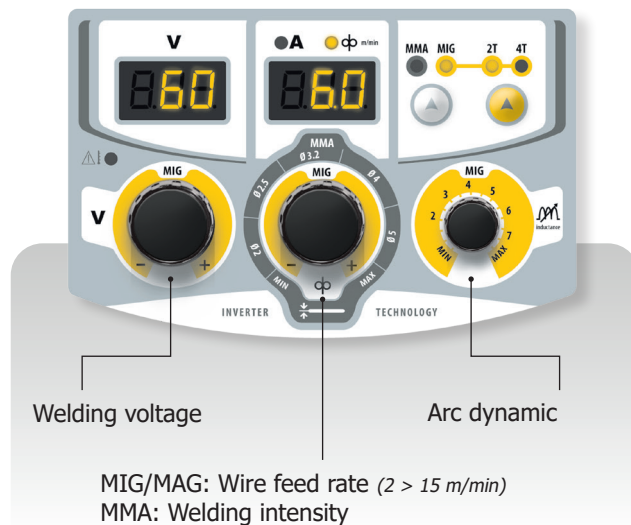

Electrode holder
300 A - 4 m - 35 mm ²
043862
























	Rollers type A	
STEEL / STAINLESS STEEL	Ø 0.6 / 0.8	042339
	Ø 0.8 / 1.0	041189
ALUMINIUM	Ø 0.8 / 1.0	041196
	Ø 0.8 / 0.9	046856
Cored wire	Ø 0.9 / 1.2	042346


Trolley JOB SITE XL
039568



Supplied with:



																					
50/60 Hz	A	A	A	GAZ	NO GAZ	200	300	Ø mm	Ø mm	Electronic Control	m/min	équipé d'origine / original equipment / originalausstattung / equipamiento de fabrica	MIG-MAG	MMA	U ₀			IP	Protected & compatible POWER GENERATOR (+/- 15%)		
400 V 3~	16	40 → 220	40 → 250	0.6	0.9	✓	✓	1.6 → 5		2 → 15	0.8	1.0	170 A	130 A	150 A	120 A	59	58 x 52 x 32	32	IP 21	10 kVA