

The liquid-cooled MIG/MAG welding torches meet the needs of welders for a wide range of welding tasks. The GRIP handle's anti-slip coating and new ball joint provide you with exceptional working comfort.

DESCRIPTION

This flashlight is very appreciated for the small size of the gooseneck.
Use for precise work requiring medium power.


FEATURES

- **Max current (Imax):** 300 A: CO2 and 270 A: Ar/CO2
In pulsed mode, these capacities are reduced by 35%.
- **Duty cycle:** 270 A @ 100 %
- **Recommended wire diameters:** 0.8 to 1.2 mm
- **Lengths:** 3 m & 4 m



CONSUMABLES

Torch

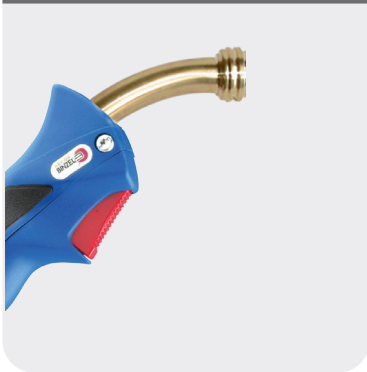

Contact tube supports & diffusers

STEEL	ALU
043589	

STEEL	ALU
	043541

Contact tubes

	STEEL	ALU
Ø 0.6	041905	-
Ø 0.8	041950	041059
Ø 1.0	041967	041066
Ø 1.2	041974 ●●	041073 ●●●

Nozzles

	STEEL
Ø 12	043534 ●●●●

	ALU
Ø 17	046221

Sheath

	Ø 0.6/0.8		Ø 1.0 & 1.2		Ø 1.2 & 1.6	
	3 m	4 m	3 m	4 m	3 m	4 m
Steel	041592	041837	041608 ●	041844 ●	418417	418424
Teflon	041578	044050	041585 ●	044067 ●	-	044074
Carbon	-	039834	-	039827	-	039810

- Original steel equipment 3 m
- Original aluminium equipment 3 m

- Original steel equipment 4 m
- Original aluminium equipment 4 m