

The liquid-cooled MIG/MAG welding torches meet the needs of welders for a wide range of welding tasks. The GRIP handle's anti-slip coating and new ball joint provide you with exceptional working comfort.

DESCRIPTION

This flashlight is very appreciated for the small size of the gooseneck.
Use for precise work requiring medium power.


FEATURES

- **Max current (Imax):** 300 A: CO2 and 270 A: Ar/CO2
In pulsed mode, these capacities are reduced by 35%.
- **Duty cycle:** 270 A @ 100 %
- **Recommended wire diameters:** 0.8 to 1.2 mm
- **Lengths:** 3 m & 4 m



CONSUMABLES

Torch

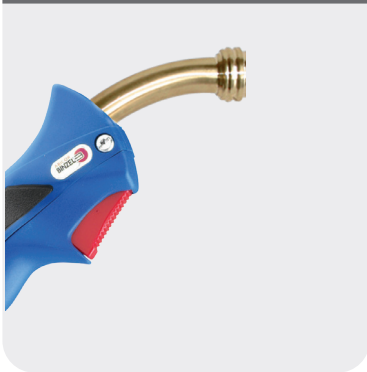

Contact tube supports & diffusers

| STEEL | ALU |
|--------|-----|
| 043589 | |

| STEEL | ALU |
|-------|--------|
| | 043541 |

Contact tubes

| | STEEL | ALU |
|-------|-----------|------------|
| Ø 0.6 | 041905 | - |
| Ø 0.8 | 041950 | 041059 |
| Ø 1.0 | 041967 | 041066 |
| Ø 1.2 | 041974 ●● | 041073 ●●● |

Nozzles

| | STEEL |
|------|-------------|
| Ø 12 | 043534 ●●●● |

| | ALU |
|------|--------|
| Ø 17 | 046221 |

Sheath

| | Ø 0.6/0.8 | | Ø 1.0 & 1.2 | | Ø 1.2 & 1.6 | |
|--------|-----------|--------|-------------|----------|-------------|--------|
| | 3 m | 4 m | 3 m | 4 m | 3 m | 4 m |
| Steel | 041592 | 041837 | 041608 ● | 041844 ● | 418417 | 418424 |
| Teflon | 041578 | 044050 | 041585 ● | 044067 ● | - | 044074 |
| Carbon | - | 039834 | - | 039827 | - | 039810 |

- Original steel equipment 3 m
- Original aluminium equipment 3 m

- Original steel equipment 4 m
- Original aluminium equipment 4 m